

**ACMA Series**  
Common Mode Filters For Automotive Signal Line  
Size 4532

**FEATURES**


- 
- 
- 
- 
- 

**APPLICATION**

- 

Dimensions: [mm]

Land Pattern: [mm]





Electrical Properties:

0.60±0.2

| P |  |  |  |  |  |  | IR |  |
|---|--|--|--|--|--|--|----|--|
|   |  |  |  |  |  |  |    |  |

Typical Electrical Characteristics:

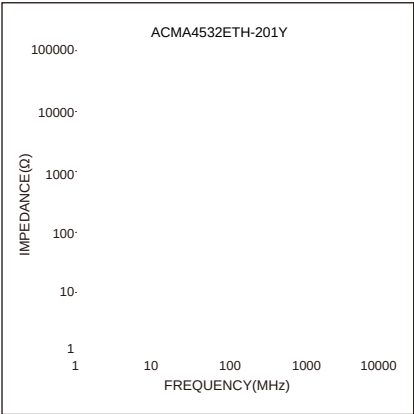



Soldering Reflow:


Preheat condition: 150 ~200℃ / 60~180 sec.  
Allowed time above 217℃: 60~150 sec.  
Max temperature: 260℃.  
Allowed Reflow time: 3x max.

Packaging Information:

Tape Dimension :

| Series      | A0<br>(mm) | B0<br>(mm) | D<br>(mm) | P0<br>(mm) | P1<br>(mm) | W<br>(mm)  | K0<br>(mm) | E<br>(mm)  | T<br>(mm)   |
|-------------|------------|------------|-----------|------------|------------|------------|------------|------------|-------------|
| ACMA4532ETH | 3.60 ± 0.1 | 4.90 ± 0.1 | 1.5 ± 0.1 | 4.0 ± 0.1  | 8.0 ± 0.1  | 12.0 ± 0.3 | 3.0 ± 0.1  | 1.75 ± 0.1 | 0.26 ± 0.05 |

Peel force of top cover tape:

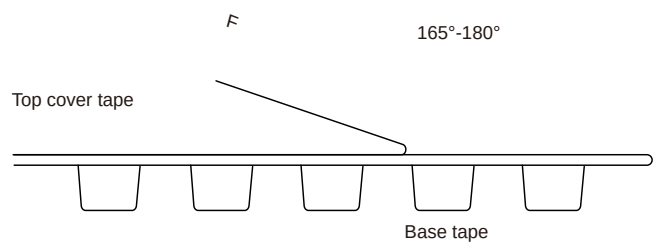

Reel Dimension: [mm]



## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- 
- 
- 
-