

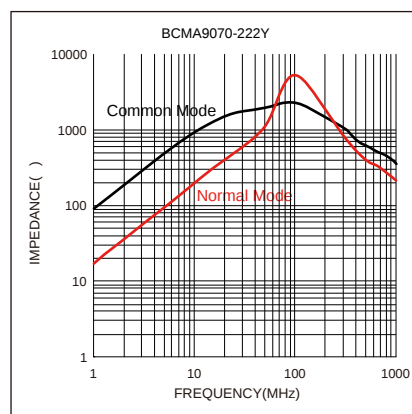
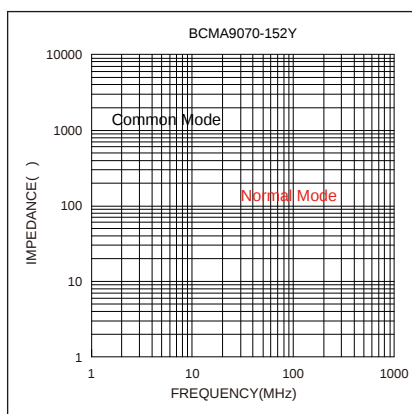
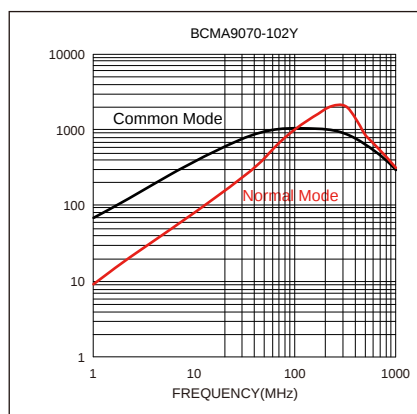
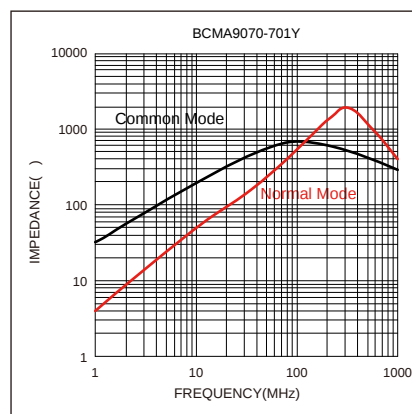


[illegible]

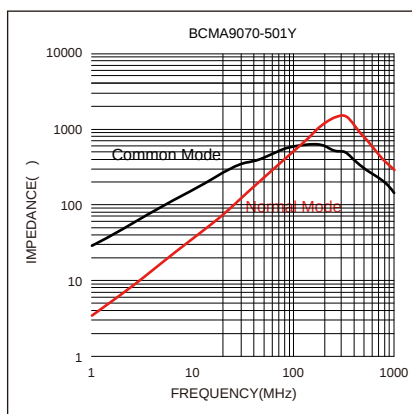

Typical Electrical Characteristics:

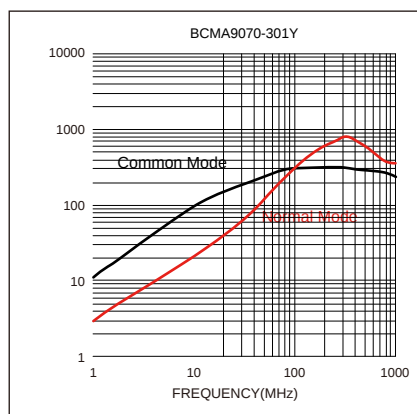

Soldering Reflow:



Preheat condition: 150 ~200℃ / 60~180 sec.
Allowed time above 217℃ : 60~150 sec.
Max temperature: 260℃ .
Max time at max temperature: 10 sec.
Allowed Reflow time: 3x max.

Packaging Information:

Tape Dimension :


A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
7.6±0.1	9.60±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.10±0.1	1.75±0.1	0.35±0.05

Product Marking:


Marking	Printing (Impedance)
---------	----------------------



Peel force of top cover tape:

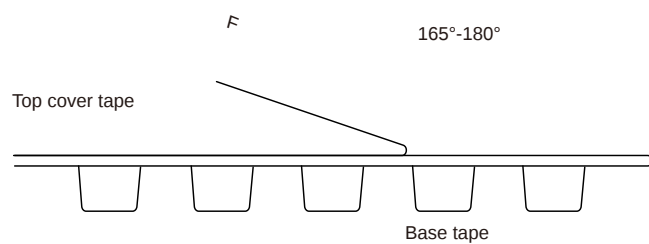

Reel Dimension: [mm]

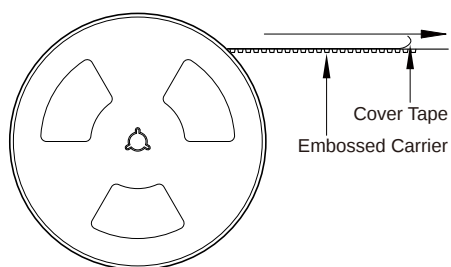



Packaging Quantity:

Cautions and Warnings:

Storage Conditions: