

# FHC Series

## CHARACTERISTICS


- 
- 
- 
- 

Magnetic shielded structure

## APPLICATION

- 
- 

High current DC/DC converter  
LC filter

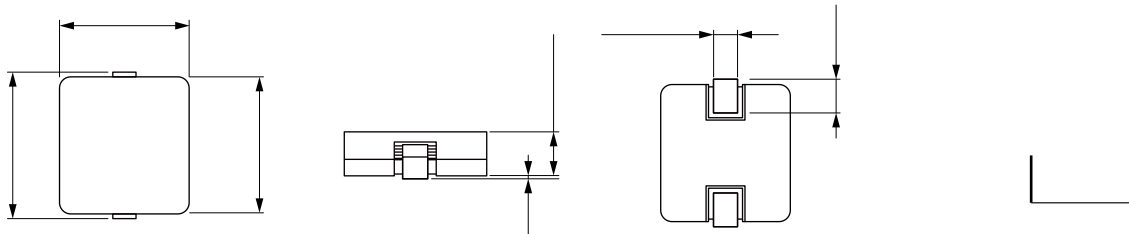

Operating Temperature : -40 °C to +125 °C

Temperature Rise Current: the actual value of DC current when the temperature rise is  $\Delta T 50^{\circ}\text{C}$

Saturation Current that will cause initial inductance to drop approximately 30%

