

MD Series

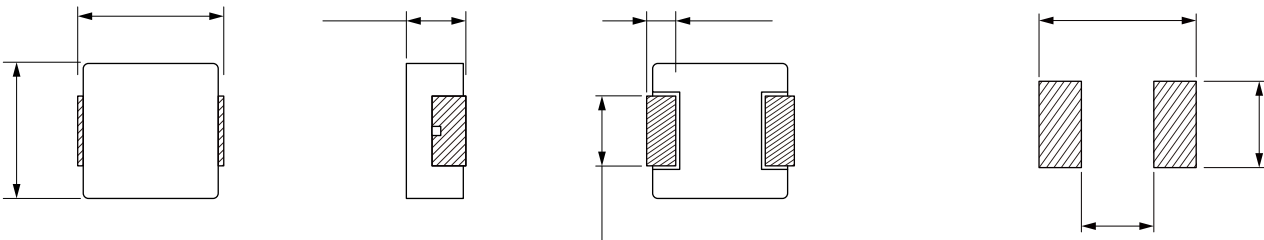


CHARACTERISTICS

- Molded type
- High saturation current due to CIP material
- Nature air gap and no acoustic noise
- Different sizes available
- Operating temperature: -40 to +125 °C
- Quantity: 3000pcs

APPLICATION

- LC filter

[illegible]

Temperature rise current : The actual value of DC current when the temperature rise is $\Delta T 40^{\circ}\text{C}$
 Saturation Current will cause L to drop approximately 30%

