

MDE Series

Molding Power Inductors

Size 0840




FEATURES

- ,
-
-
- 8P00† PÜX öŸaa QÜσ\$ ŠŸ\$ üÜ ΨÜP\$Ω° ÖÜΩσüoŸÖΓÜΩ
-
- hμ\$otΓ° ü\$Ψμ\$otüŸo\$ otΩ°\$ / üÜ /
- vŸ†ΩΓübl μÖσ


APPLICATION

-
-
-
-
-
-

Dimensions: [mm]

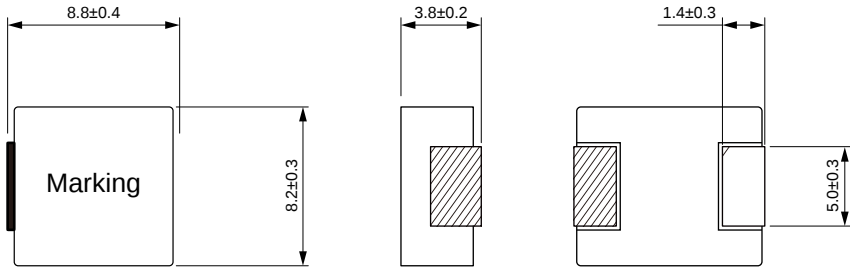

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance @ 100kHz/1V (μH)	Tolerance	DC Resistance Max. (mΩ)	Satura on Current Max. (A)	Temperature Rise Current Max. (A)
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 w a					
a 59 a					



Part No		Inductance @ 100kHz/1V (μH)	Tolerance	DC Resistance Max. (mΩ)	Satura on Current Max. (A)	Temperature Rise Current Max. (A)
a 59	a					
a 59	a					
a 59	a					
a 59	a					

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$