




Size 20121A

- High current, low DCR,high efficiency.
 - Very low acoustic noise and very low leakage flux noise.
 - AEC-Q200 qualified
 - 100% Lead(Pb)-Free and RoHS compliant.
 - Operating temperature: -55 to +155 °C (including self-temperature rise)
 - Quantity: 3000PCS
-
- ADAS
 - Headlamps, tail lamps and interior lighting
 - HVAC
 - Doors, window lift and seat control
 - Audio subsystem
 - Digital instrument cluster
 - In-Vehicle Infotainment and navigation

Dimensions: [mm]

Land Pattern: [mm]

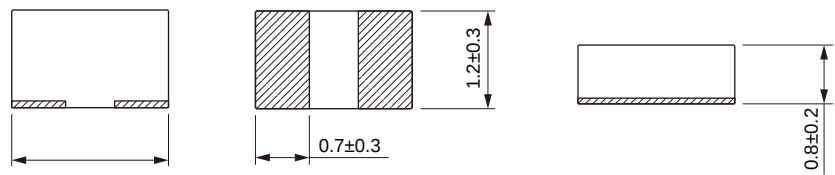

Electrical Properties:

Part No								
MDTA20121A-R10M								
MDTA20121A-R22M								
MDTA20121A-R24M								
MDTA20121A-R33M								
MDTA20121A-R47M								
MDTA20121A-R68M								
MDTA20121A-1R0M								
MDTA20121A-1R5M								
MDTA20121A-2R2M								

Typical Electrical Characteristics:

