



applications.
surface mounting.


electronic equipment
battery lines or larger
word processors




Electrical Properties:

Typical Electrical Characteristics:

Typical Impedance Characteristics:




Soldering Reflow:

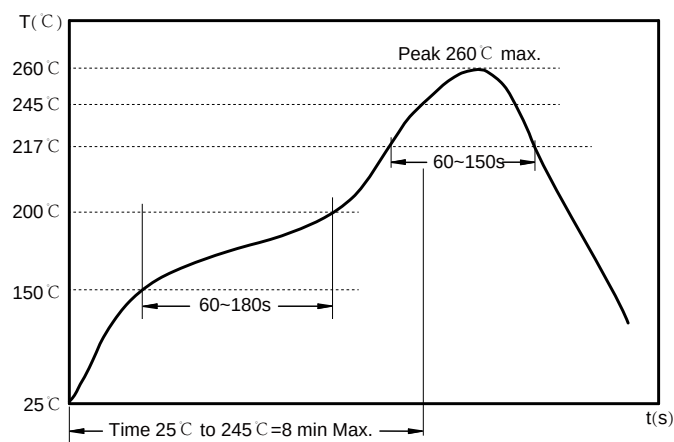

Preheat condition: 150 ~200 °C/ 60~180 sec.
Allowed time above 217 °C: 60~150 sec.
Max temperature: 260 °C.
Max time at max temperature: 10 sec.


Packaging Information:

Tape Dimension :

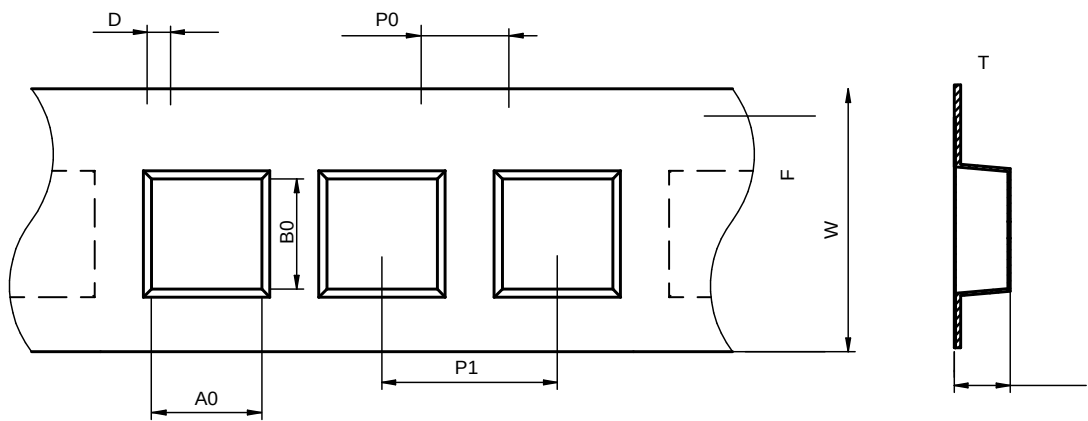


A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	F (mm)	T (mm)
6.80±0.1	9.40±0.1	1.5±0.1	4.0±0.1	12.0±0.1	16.0±0.3	2.9±0.1	7.5±0.1	0.35±0.05


Peel force of top cover tape:

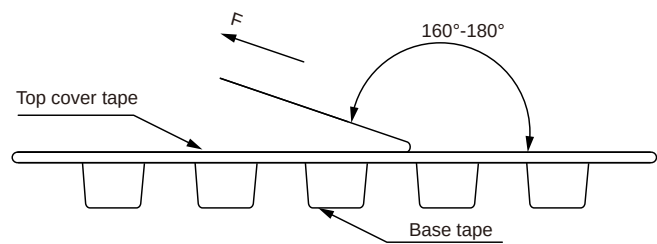

Reel Dimension: [mm]

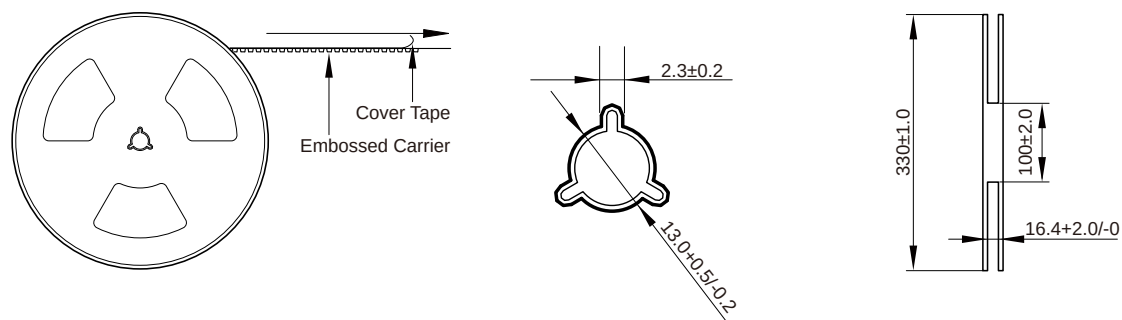

Packaging Quantity:

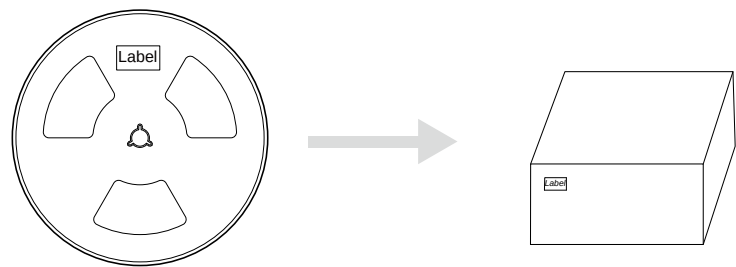

1500 Pcs/Reel

2 Reel /Inner box(3K Pcs)

3 Inner box/Carton box(9K Pcs)

Cautions and Warnings:

Storage Conditions:

-
-
-

Operation Instructions: