

THC Series

SMD High Current Inductor

Size 2017


CHARACTERISTICS

- I λΞK äI-údzNI-ə2y'ÖdzNIUSyú dzLJ ú2 mml !
- [2ð t2ääŠă øλúK bI-ú øλUS ŘŠăλ3y'
- [2ð Ö2US t2ääŠă øλúK ayÿy'Ö2US YI-úŠNIλI-f
- vdzI-yəúèY mmlLJÖă


APPLICATION

- I λΞK ÖdzNIUSyú 5 / κ5 / Ö2yðŠNIúŠNI
- [/ ŮtúŠNI

Dimensions: [mm]

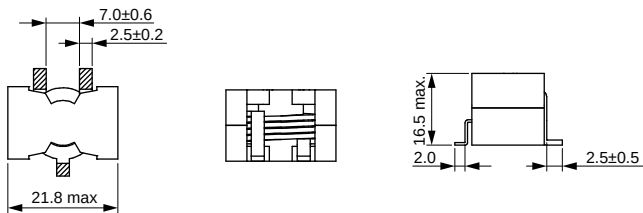

Land Pattern: [mm]



Electrical Properties:

hLJŠNI-əy3 çSYLJŠNI-údzNISY ππl °C ú2 bMHP °C
 çSYLJŠNI-údzNIS wlaŠ / dzNIUSyúY úKS I-ÖúdzI-f ØI-fdzŠ 27 5 / ÖdzNIUSyú øKŠy'úKS úSYLJŠNI-údzNIS wlaŠ læ nçπl °C
 { I-údzNI-ə2y / dzNIUSyú úKI-ú øλff ÖI-dzăŠ λyλəI-f λyŘdzÖúI-yÖŠ ú2 ŘNI2LJ I-LJLJN2ÈλYI-úŠİè Hπ:

Typical Electrical Characteristics:

