

WWCI Series




CHARACTERISTICS

- λ μήκος κύματος λ_{max} λ_{min} v λ_{avg} λ_{eff} {WC
- α. ύψος στήλης H ύψος όψης H_{eff} H_{avg} H_{min} H_{max}
- {Ψ Ψ_{eff} Ψ_{avg} Ψ_{min} Ψ_{max} Ψ_{avg} Ψ_{min} Ψ_{max}
- νήτωση μm

APPLICATION

- IC μm μm μm μm

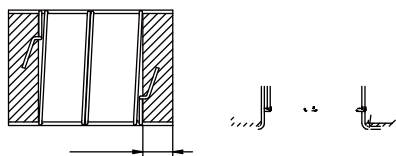



Part No	Inductance (nH)	Test Condi on @MHz	Tolerance	Q Min.	Temperature Rise Current Max. (mA)	DCR Max. (Ω)	SRF Min. (MHz)
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	bD		%				
1000 /L	bW		%				
1000 /L	w W		%				
1000 /L	w D		%				
1000 /L	w W		%				
1000 /L	w W		%				
1000 /L	w D		%				
1000 /L	w W		%				
1000 /L	w W		%				
1000 /L	w W		%				
1000 /L	w W		%				
1000 /L	w W		%				
1000 /L	w W		%				

hμ\$otfΩ° ú\$Ψμ\$otúñc\$ úű /



C

1 10 100 1000 10000

1 10 100 1000 10000

